

IMPORTANT!

**Energizer
will not
operate until
battery is
connected.**

See instructions.

Connecting the Battery

TO CONNECT THE BATTERY:

1. Remove the four battery compartment screws on the back of the energizer.
2. Remove the battery door and the rubber gasket. (see Figure A)
3. Take battery out of compartment. Connect the black wire to the terminal marked with black. Connect the red wire to the terminal marked with red. (see Figure B)
4. Insert battery into compartment. Position wires in the open cavity above the battery. Do not allow the battery to pinch the wires. (see Figure C)

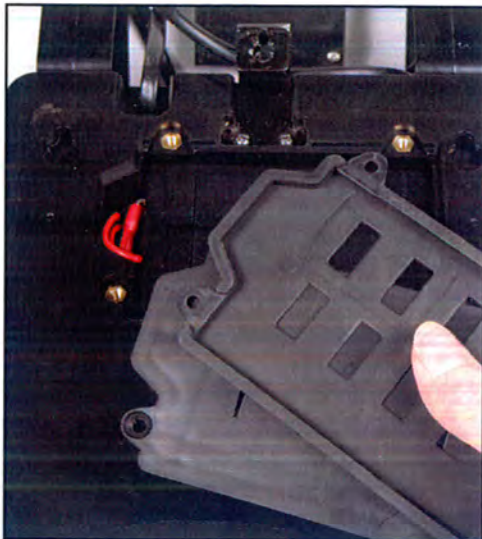


Figure A



Figure B

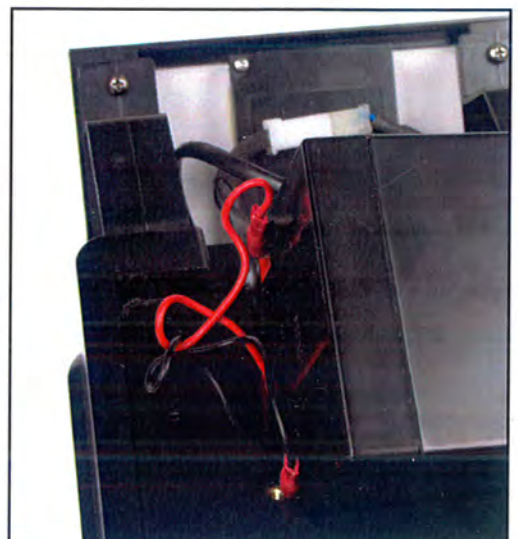


Figure C


Supplemental Solar Energizer Instructions

1. **INSTRUCTIONS:** This sheet provides special information for solar energizers only. For general troubleshooting and fence installation, refer to the Dare Instruction Manual. **READ ALL INCLUDED INSTRUCTIONS!**
2. **MOUNTING INSTALLATION:** For T-post mounting, see Fig. A and B on reverse side. Position energizer facing due south into the sun at its highest point, or at 12:00 noon on a sunny day. Select an area with no obstructions from buildings, trees, roof overhangs, etc. Locate the energizer out of reach of animals and children. Make certain that the energizer is securely installed to prevent your solar panel from shifting out of its optimum charging position. You are now ready to charge your energizer's internal batteries.
3. **INITIAL CHARGING:** Before energizing your fence, it is necessary to charge the internal batteries of your energizer. Switch the energizer toggle switch to the "CHARGE" position. Place energizer in direct sunlight for a minimum of 3 days. **NOTE:** A fully charged battery will last 18 dark days (no sunlight).
4. **CONNECTIONS:** Make certain the white connector on the solar panel wire is connected to the white connector of the "power-in" cable, which enters near the top of the case. See battery connection instructions on the back of the energizer.
5. **ENERGIZER OPERATION:** After you have charged your battery for 3 days and made the proper connections, switch the toggle switch to the "ON" position. Make sure your hands are not touching the fence terminals. The light will begin flashing, indicating that the energizer is now operating. **NOTE:** In the "ON" position, the solar panel is actively charging the internal batteries as well.
6. **MAINTENANCE:** Check the energizer and solar panel regularly for proper operation. Clean the surface of the solar panel as needed with a damp cloth. Do not use any abrasive cleaning pads or agents that might damage the panel's glass.

Mounting Your Solar Energizer

T-POST MOUNTING:

STEP 1:
Fig. A

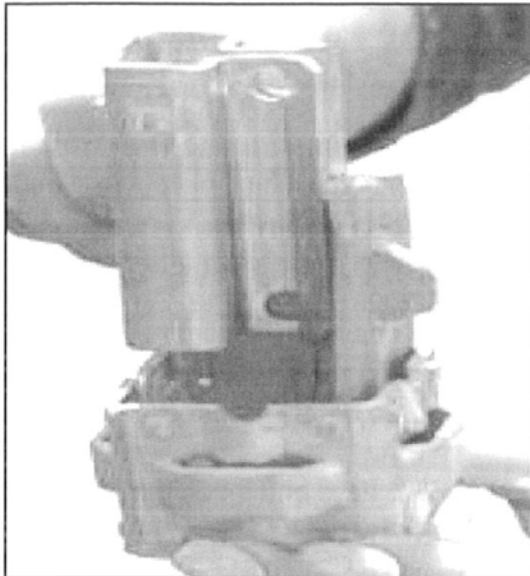

Install collar and brace

STEP 2:
Fig. B



Insert hanger into collar slot